

# XD100



# XD100

**Vibratory Roller**

XD100 is suitable for compaction of soil and asphalt pavement in narrow areas such as sidewalks, parking lots and residential roads, it can also be used for compacting thin stable soil layering, which is an ideal compaction equipment for asphalt surface laminating in municipal maintenance and high-speed pipe maintenance.



## Performance and characteristics


- 67Hz high frequency vibration, 720mm large diameter drum, quick and efficient compaction.
- 210L large-capacity water tank, interval controlled sprinkling for prolonged operation.
- Small turning radius, high flexibility, wider application

- range.
- Drum and articulated frame are maintenance-free during the whole life cycle.
- Excellent side visibility, superior control experience.

## Main dimensions

Unit: mm

Model	L	L1	W	W1	H	H1	H2	S	D
XD100	2610	1773	1086	1000	1845	2575	275	12	720

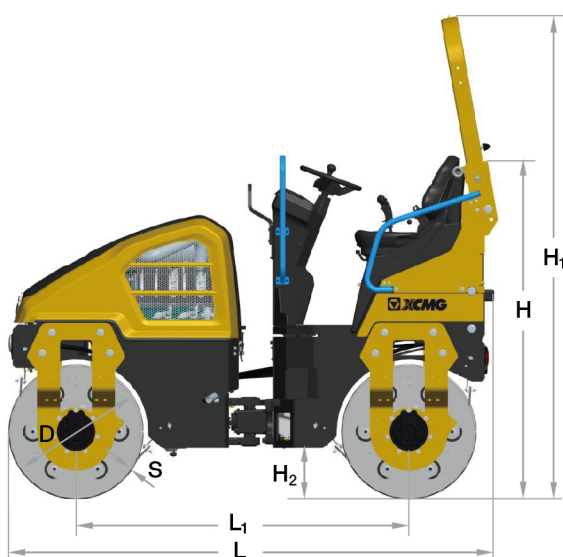

## Main specifications

Item	Content	Unit	XD100
<b>Weights</b>	Operating weight	kg	2650
	Maximum operating weight	kg	3250
	Front axle weight	kg	1250
	Rear axle weight	kg	1400
	Static linear load	N/cm	122/137
<b>Maneuverability</b>	Operating speed	km/h	0-10
	Gradeability	%	30
	Minimum turning radius(outer)	mm	3600
	Minimum ground clearance	mm	275
	Wheel base	mm	1773
	Steering angle	°	±32
	Oscillation angle	°	±8
<b>Compaction parameters</b>	Vibration frequency	Hz	63/67
	Nominal amplitude	mm	0.5
	Excitation force	kN	30/34
	Drum diameter	mm	720
	Drum width	mm	1000
<b>Engine</b>	Model	-	D1803
	Emission		EU Stage V/EPA TIER4F
	Rated power	KW	24.6
	Rated speed	r/min	2400
<b>Capacities</b>	Fuel tank	L	35
	Water tank	L	210